



mirarco
MINING INNOVATION

 National Resources
Canada

Ressources naturelles
Canada

 **VALE**

Performance Evaluation of Diesel Particulate-Filter Low NO₂ CRT

Joe Stachulak, MIRARCO
David Young, Brent Rubeli CanmetMINING
Kevin Watson, Brian McLean, Vale

MDEC
2022

0

Background

- This study evaluated the emissions from a Caterpillar engine C11, Tier 3, obtained with and without the application of Johnson Matthey **Diesel-Particulate-Filter Low NO₂-CRT** emission control device.
- The result of this study will provide information on the emission performance of the DPF for application in Underground mines where increase of NO₂ in the mine environment is undesirable. The testing was performed at the Diesel Emissions Research Laboratory at CANMETMINING, Ottawa.

1

1

Background

- The emission testing was performed on an engine dynamometer under controlled conditions using the ISO 8178-C1, 8-mode test cycle.
- Measurements were made for the basic engine parameters and exhaust gas concentrations were measured for carbon monoxide (CO), carbon dioxide (CO₂), oxygen (O₂), nitric oxide (NO), oxides of nitrogen (NO_x), total hydrocarbons (THC), and diesel particulate matter (DPM).
- Measurements were also made for nano-particle distribution for each 8-mode cycle.
- Several steady state and transient test cycles were performed to calibrate and fine tune the fuel injection protocol for emission reduction device.

2

2

Introduction

- The engine dynamometer followed ISO 8178-C1 8-mode test cycle plus Canmet 22 point emission mapping, and LHD transient test cycle protocol and used ultra-low sulphur diesel fuel.
- Two final 8-Mode tests were performed for this study including,
 - (1) engine only baseline, and
 - (2) engine CRT. These tests were used for final evaluation of the device.
- For all test cycles, carbon monoxide (CO), carbon dioxide (CO₂), oxygen (O₂), nitric oxide (NO), oxides of nitrogen (NO_x), total hydrocarbons (THC), diesel particulate matter (DPM) and nano-particles were measured.
- For this testing, Diesel-Particulate-Filter Low NO₂-CRT was provided by Johnson Matthey Limited.
- The engine was provided by Toromont/Sudbury

3

3

Experimental Approach

- This section provides some information on the test engine, test fuel, and test procedure for the evaluation of the DPM control technologies.
- Test Engine**
 - The engine used for the testing was a Cat C11. Table 1 provides some engine specification data.

Table 1. Test engine specifications

Make	Caterpillar
Model	C11, Tier 3
Serial number	RSX05190
Displacement	11 Liter
Rated power, gross	353 hp @ 1800 rpm
Fuel rate at rated power	118.5 lb/hr
Peak torque	1089 lb.ft @1600 rpm
Peak torque speed	1600 rpm
Aspiration	Turbocharged
Fuel system	DI, Electronically controlled fuel injection
Max air intake restriction	15" H ₂ O
Max exhaust backpressure	40" H ₂ O
Low idle speed	700 rpm
High idle speed	2120 rpm

4

4

Test Fuel

- The diesel fuel used for this study was an ultra-low sulphur diesel fuel with a sulphur value of 11 ppm (CAN/CGSB-3.517-2000). Some of the laboratory analysed fuel properties are given in Table 2.

Table 2. Some diesel fuel properties

Properties	ASTM test method	Analysis
Specific gravity 60/60F	D4052	0.8248
Density @ 15°C, kg/m ³	D4052	824.1
Carbon, wt%	D5291	86.32
Hydrogen, wt%	D5291	13.94
Nitrogen, wt%	D5291	<0.3
Flash point, °C	D93	54.1
Sulphur, ppm	D7039	10.8

5

5

Gases and DPM Control Devices

- Johnson Matthey supplied a Diesel-Particulate-Filter Low NO₂-CRT diesel particulate filter for this study. The device was tested after it was tuned for optimum performance.
- Prior to testing, the device was installed as shown in Figure 1.



Figure 1 - Diesel-Particulate-Filter Low NO₂-CRT emission control device and Caterpillar C11 diesel engine installed in the CanmetMINING test cell

6

6

Gases and DPM Control Devices

- The device was calibrated according to the test cycles 1 to 6
- Test data received from these 6 test cycles was provided to the device manufacturer representative for calibration purposes

7

7

Test Procedure

- The engine exhaust emissions were measured at all modes of the ISO 8178-C1 test cycle. The 8-Mode test cycle for the Caterpillar C11 engine is defined in Table 3. The integrated 8-Mode average values for all tests were calculated using the appropriate weighting factors for each mode.

Table 3. ISO 8178-C1 8- Mode test cycle

Mode #	1	2	3	4	5	6	7	8
Engine Speed, rpm	1800				1350			700
Torque, %	100	75	50	10	100	75	50	0
Weighting factor	0.15	0.15	0.15	0.1	0.1	0.1	0.1	0.15

8

8

Gaseous Emission Measurement

- The raw exhaust gas concentrations were measured using a California Analytical Instruments (CAI) gas cart.
- The gas cart consists of an exhaust gas sampling and conditioning system, emission analysers, 64 point gas divider for system calibration, and NOx efficiency tester. The gas cart contains the following gas analyzers:
 - Low range carbon monoxide (CO), model CAI 100 IR, non-dispersive infrared (NDIR) detection system, span ranges 0-100 ppm and 0-2000 ppm.
 - Carbon dioxide (CO₂) and high carbon monoxide (HCO) model CAI 300 IR, non- dispersive infrared (NDIR) detection system, CO₂ span ranges 0-5.0% and - 0-20.0%, and CO span range 0-1.0%.
 - Oxygen (O₂), model CAI 300 Oxygen, paramagnetic (PMA) detection system, span ranges 0-5% and 0-25%.
 - Oxides of nitrogen (NO/NO_x), model CAI 400 HCLD heated, chemiluminescence (CLD) detection system, span ranges 0-1000 ppm and 0-3000 ppm. The gas cart has two NO/NO_x analyzers that provide simultaneous measurements of NO and NO_x. The concentration of NO₂ is determined by the difference of NO_x and NO concentrations.
 - Total hydrocarbons (THC), model CAI 300 HFID, heated flame ionization detector (HFID), span ranges 0-100 ppm and 0-1000 ppm.

9

9

Particulate and Nanoparticle Measurement

Particulate Measurement

- The Diesel Particulate Matter (DPM) was measured gravimetrically using a Sierra BG-2 particulate partial flow sampling system

Nano-particle Measurement

- A Thermo Scientific Inc. scanning mobility particle sizer (SMPS) 3080 spectrometer was used to measure the size distribution of diluted diesel exhaust in the size 14 to nm to 710 nm distribution.

10

10

Diesel – Particulate- Filter Low NO₂-CRT

- The Diesel-Particulate-Filter Low NO₂-CRT was installed and operated by the manufacturer representative.
- The regeneration of the filter is by NO₂ oxidation. Soot is burnt continuously in the filter unit with the aid of catalyst generated nitrogen dioxide (NO₂), which reacts with the soot collected in the filter, producing carbon dioxide (CO₂) and NO; CO and HC Emissions are also reduced by oxidation.
- The NO₂ slip is reduced using the reaction of injected HC (Diesel fuel) together with NO₂ over a special catalyst

11

11

Diesel – Particulate- Filter Low NO₂-CRT – Test Results


- Test Results
- Table 4 provides 8-Mode integrated average values of specific emission data for gases and DPM

Integrated Specific emissions		Baseline Test 8	CRT Test 7	Reduction
CO ₂	g/hr	86817.3	87687.2	-1.0%
CO	g/hr	279.7	11.5	95.9%
NO ₂	g/hr	33.5	15.1	55.0%
NO	g/hr	242.3	250.1	-3.2%
NO _x	g/hr	275.8	265.3	3.8%
THC	g/hr	23.2	9.7	58.0%
DPM	g/hr	4.8	2.5	47.7%
SMPS	dw/dlogDp	6.9.E+06	7.6.E+04	98.9%

12

12


Exhaust gas concentration (wet) comparisons

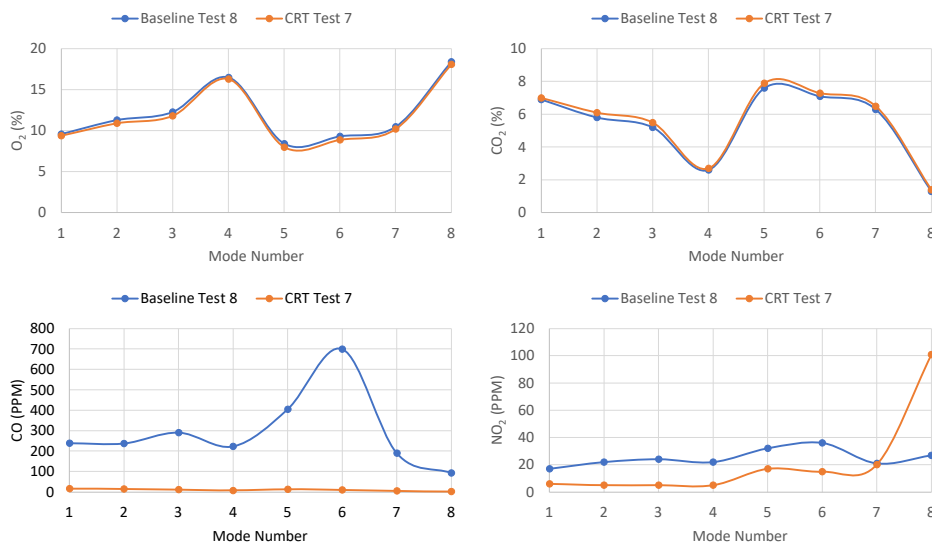

13

13


Exhaust gas concentration (wet) comparisons

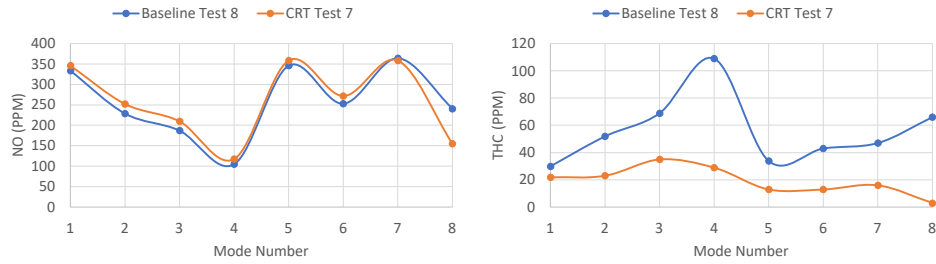

14

14


Specific emissions comparisons

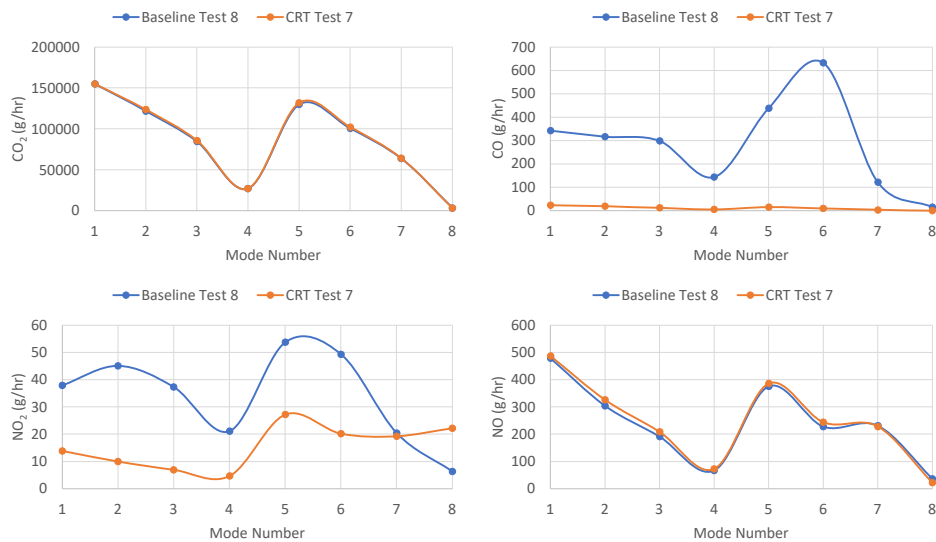

15

15

Specific emissions comparisons

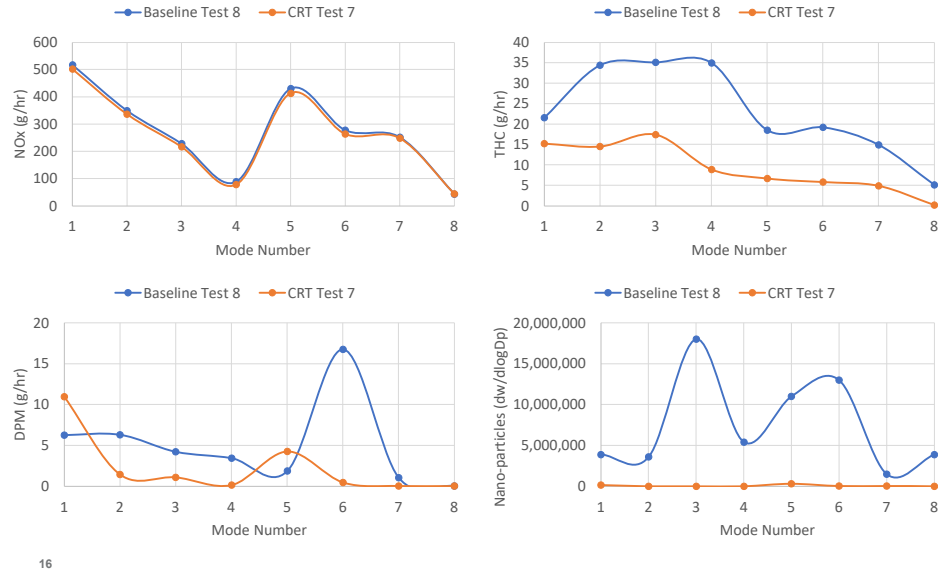

16

Test Results

- The overall DPM conversion of 47.7% reported over the Low NO₂ CRT® system is lower than expected. DPM removal over a ceramic wall flow filter is usually >90%.
- This lower than expected conversion over the filter system could be due to Diesel fuel droplets, derived from the fuel injection that takes place between the filter and the NO₂ decomposition system, slipping from the system and then being measured as DPM.

17

17

Test Results

- This theory is supported by the relatively poor reductions (58%) of THC found over the Low NO₂ CRT® system.
- A THC conversion of >90% is usually expected over a CRT® system operated at these temperatures and the higher tailpipe levels found over this "Low NO₂" system probably result from the Diesel that is added after the filter to reduce tailpipe NO₂ levels.
- The high reduction of nanoparticles again suggests that the filter is working efficiently and that the measured mass of particulate is largely due to condensed Diesel fuel rather than soot from the engine. It is expected that this level of Diesel fuel slip can be reduced in future tests by system optimisation.

18

18

Summary

- The reduction of exhaust gas emissions Johnson Matthey Diesel-Particulate-Filter Low NO₂-CRT® was evaluated on an engine dynamometer. Caterpillar C11, Tier 3 engine was emission tested over the 8-Mode test cycles. An ultra-low-sulphur (11 ppm) diesel fuel was used for this testing. The regulated gaseous emissions and particle counts were measured.
- Table 4 shows that the Diesel-Particulate-Filter Low NO₂-CRT® reduced CO by 96%, and nano-particles by 99% over the 8-Mode test cycle. Moreover, Table 4 indicates that the CRT system reduced the THC by 58% and NO₂ by 55% over the 8-Mode test cycle which is in line with the system design to keep THC and NO₂ lower than engine baseline.

19

19

Thank You

Questions



National Resources
Canada

Ressources naturelles
Canada



20

20